



Illustration A

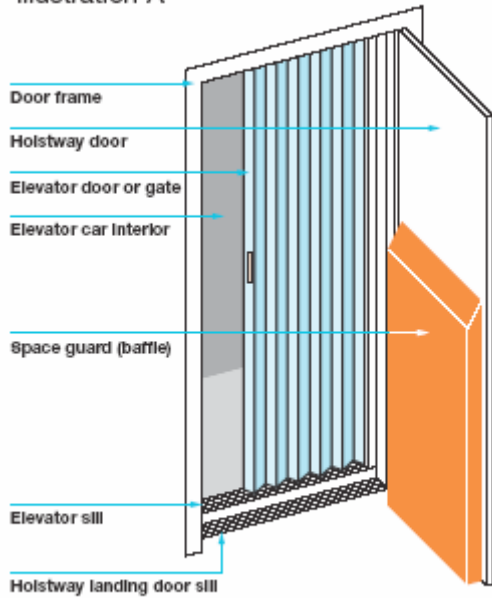

Please be aware the frame may have to be altered to reflect specific running clearances. The elevator code requires very specific tolerances. The distance between the hoistway side of the landing door or gate and the car door or gate shall not exceed 5 inches (125 mm) and the clearance between the hoistway door or gate and the hoistway edge of the landing sill shall not exceed 3 inches (75mm). Please pay attention to these details....

Illustration B

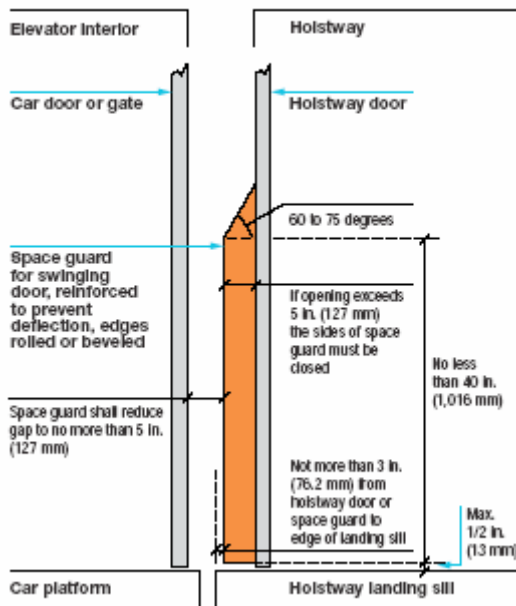

Section 3.4.3 of A17.3-2002 requires that the distance between a swing door and collapsible gate not exceed four inches and the distance between a swinging door and sliding car door not exceed 5-1/2 inches. Moreover, the distance from the hoistway side of the swing door to the hoistway edge of the landing sill should not exceed three-quarters of an inch. These criteria are illustrated in the accompanying diagrams.